





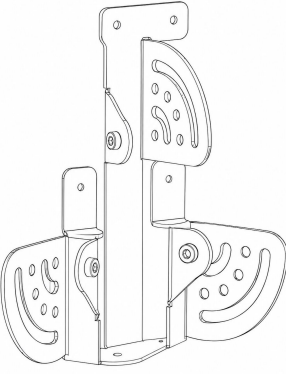
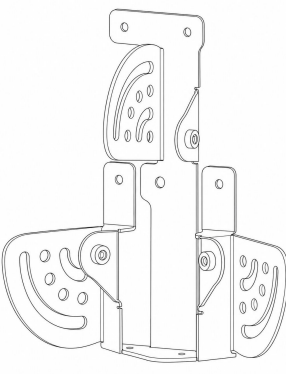
Camtraptions Quick Deploy Camera Trap Manual (*extract*)

Common Components

1. Quick Deploy Frame Parts Box

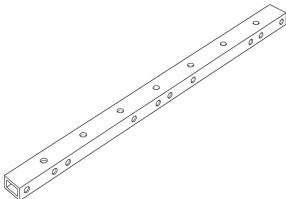
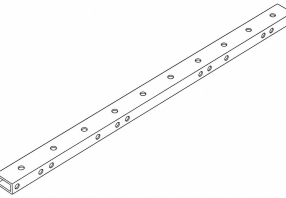
A box containing:

Image	Part Name	Quantity	Purpose
	Frame Base	1	The primary central part of the Quick Deploy Frame. Two screws secure it to the bottom of the camera housing.
	Frame Handle	1	Quick Deploy Frame Handle.

	Left Bracket	1	Attaches to the left side of the Frame Base when looking towards the front face of the frame. Provides pivoting attachment point for legs and arms.
	Right Bracket	1	Attaches to the right side of the Frame Base when looking towards the front face of the frame. Provides pivoting attachment point for legs and arms. Two screws secure it to the side of the camera housing.

2. Quick Deploy Tubes Pack





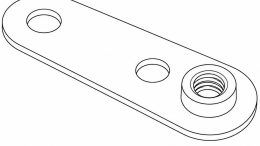

A pack containing:


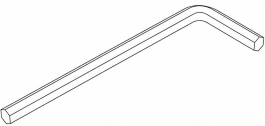
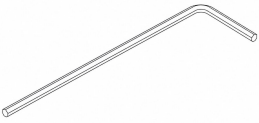
Image	Part Name	Quantity	Purpose
	300mm Tube	4	Four legs.
	400mm Tube	2	Two pivoting arms for the flashes.

3. Quick Deploy Fasteners Pack

A bag containing:

Image	Part Name	Quantity	Purpose
-------	-----------	----------	---------

	Mini Ball Head	3	For mounting the two flash housings and the PIR sensor.
	3/4 Inch Button Head Screw	3	Two of these are for mounting the Mini Ball Heads for the flashes. One extra is supplied for optionally mounting the PIR's Mini Ball Head on a leg or arm.
	5/16 Inch Button Head Screw	3	The shortest button head screw in the pack. One for mounting the PIR's Mini Ball Head on the Frame Handle. Two for securing the bottom of the Camera Housing to the Frame Base.
	3/8 Inch Button Head Screw	2	For securing the side of the Camera Housing to the Frame Base and Right Bracket.
	1.25 Inch Button Head Screw	6	Attaches each arm and leg to the left and right brackets. The legs and arms pivot on these screws.
	Friction Plate	6	Part of the pivoting assembly for each arm and leg. Each 1.25 Inch Thumbscrew fastens into the thread on these Friction Plates to secure the arms and legs.
	1.25 Inch Thumbscrew	6	The primary adjustment and clamping screw for each arm and leg.

	Serrated Nut	6	Optional nuts for allowing the Thumbscrews to fasten through the pre-defined holes in the Left and Right Brackets + Friction Plates, in order to create a more locked/anti-slip assembly.
	Rubber Foot	4	A rubberised foot for the bottom of each leg.
	M4 10mm Cap Head Screw	12	For fastening the Left Bracket and Right Bracket to the Frame Base and Frame Handle.
	M4 Nut	12	For fastening the Left Bracket and Right Bracket to the Frame Base and Frame Handle.
	4mm Hex Key	1	For initial assembly of the Quick Deploy Frame (fastening all of the Button Screws).
	2.5mm Hex Key	1	For initial assembly of the Quick Deploy Frame (fastening the M4 screws and nuts).

4. Other Equipment

Image	Part Name	Quantity	Purpose
-------	-----------	----------	---------

	PIR Motion Sensor v4	1	Detects motion and triggers the camera to take a photo.
	Z Pro Camera Trap Flash	2	Provides illumination in darker conditions and during the night.
	Flash Housing	2	Provides physical and weather protection for the Z Pro Flashes.
	Camera Housing	1	Provides physical and weather protection for the camera.
	Camera Housing Glass Window	1	Part of the assembled Camera Housing.

Exported from docs.camtraptions.com.